

Wire transport for high-alloy steel wires and non-ferrous alloys


For wire diameters up to 2.4 mm. Without Pneumatic feed assist DLDA1: Sum of the radii of the conduit $\leq 360^\circ$, Length ≤ 5 m • With DLDA1: Sum of the radii $\leq 1.800^\circ$, Length ≤ 50 m

Without DLDA1: Sum of the radii of the conduit $\leq 1.300^\circ$, Length ≤ 25 m • With DLDA1: Sum of the radii $\leq 2.500^\circ$, Length ≤ 75 m

For wire diameters up to 1.6 mm.

Sum of the radii of the conduit $\leq 1.300^\circ$, Length ≤ 25 m

For wire diameters up to 4 mm.

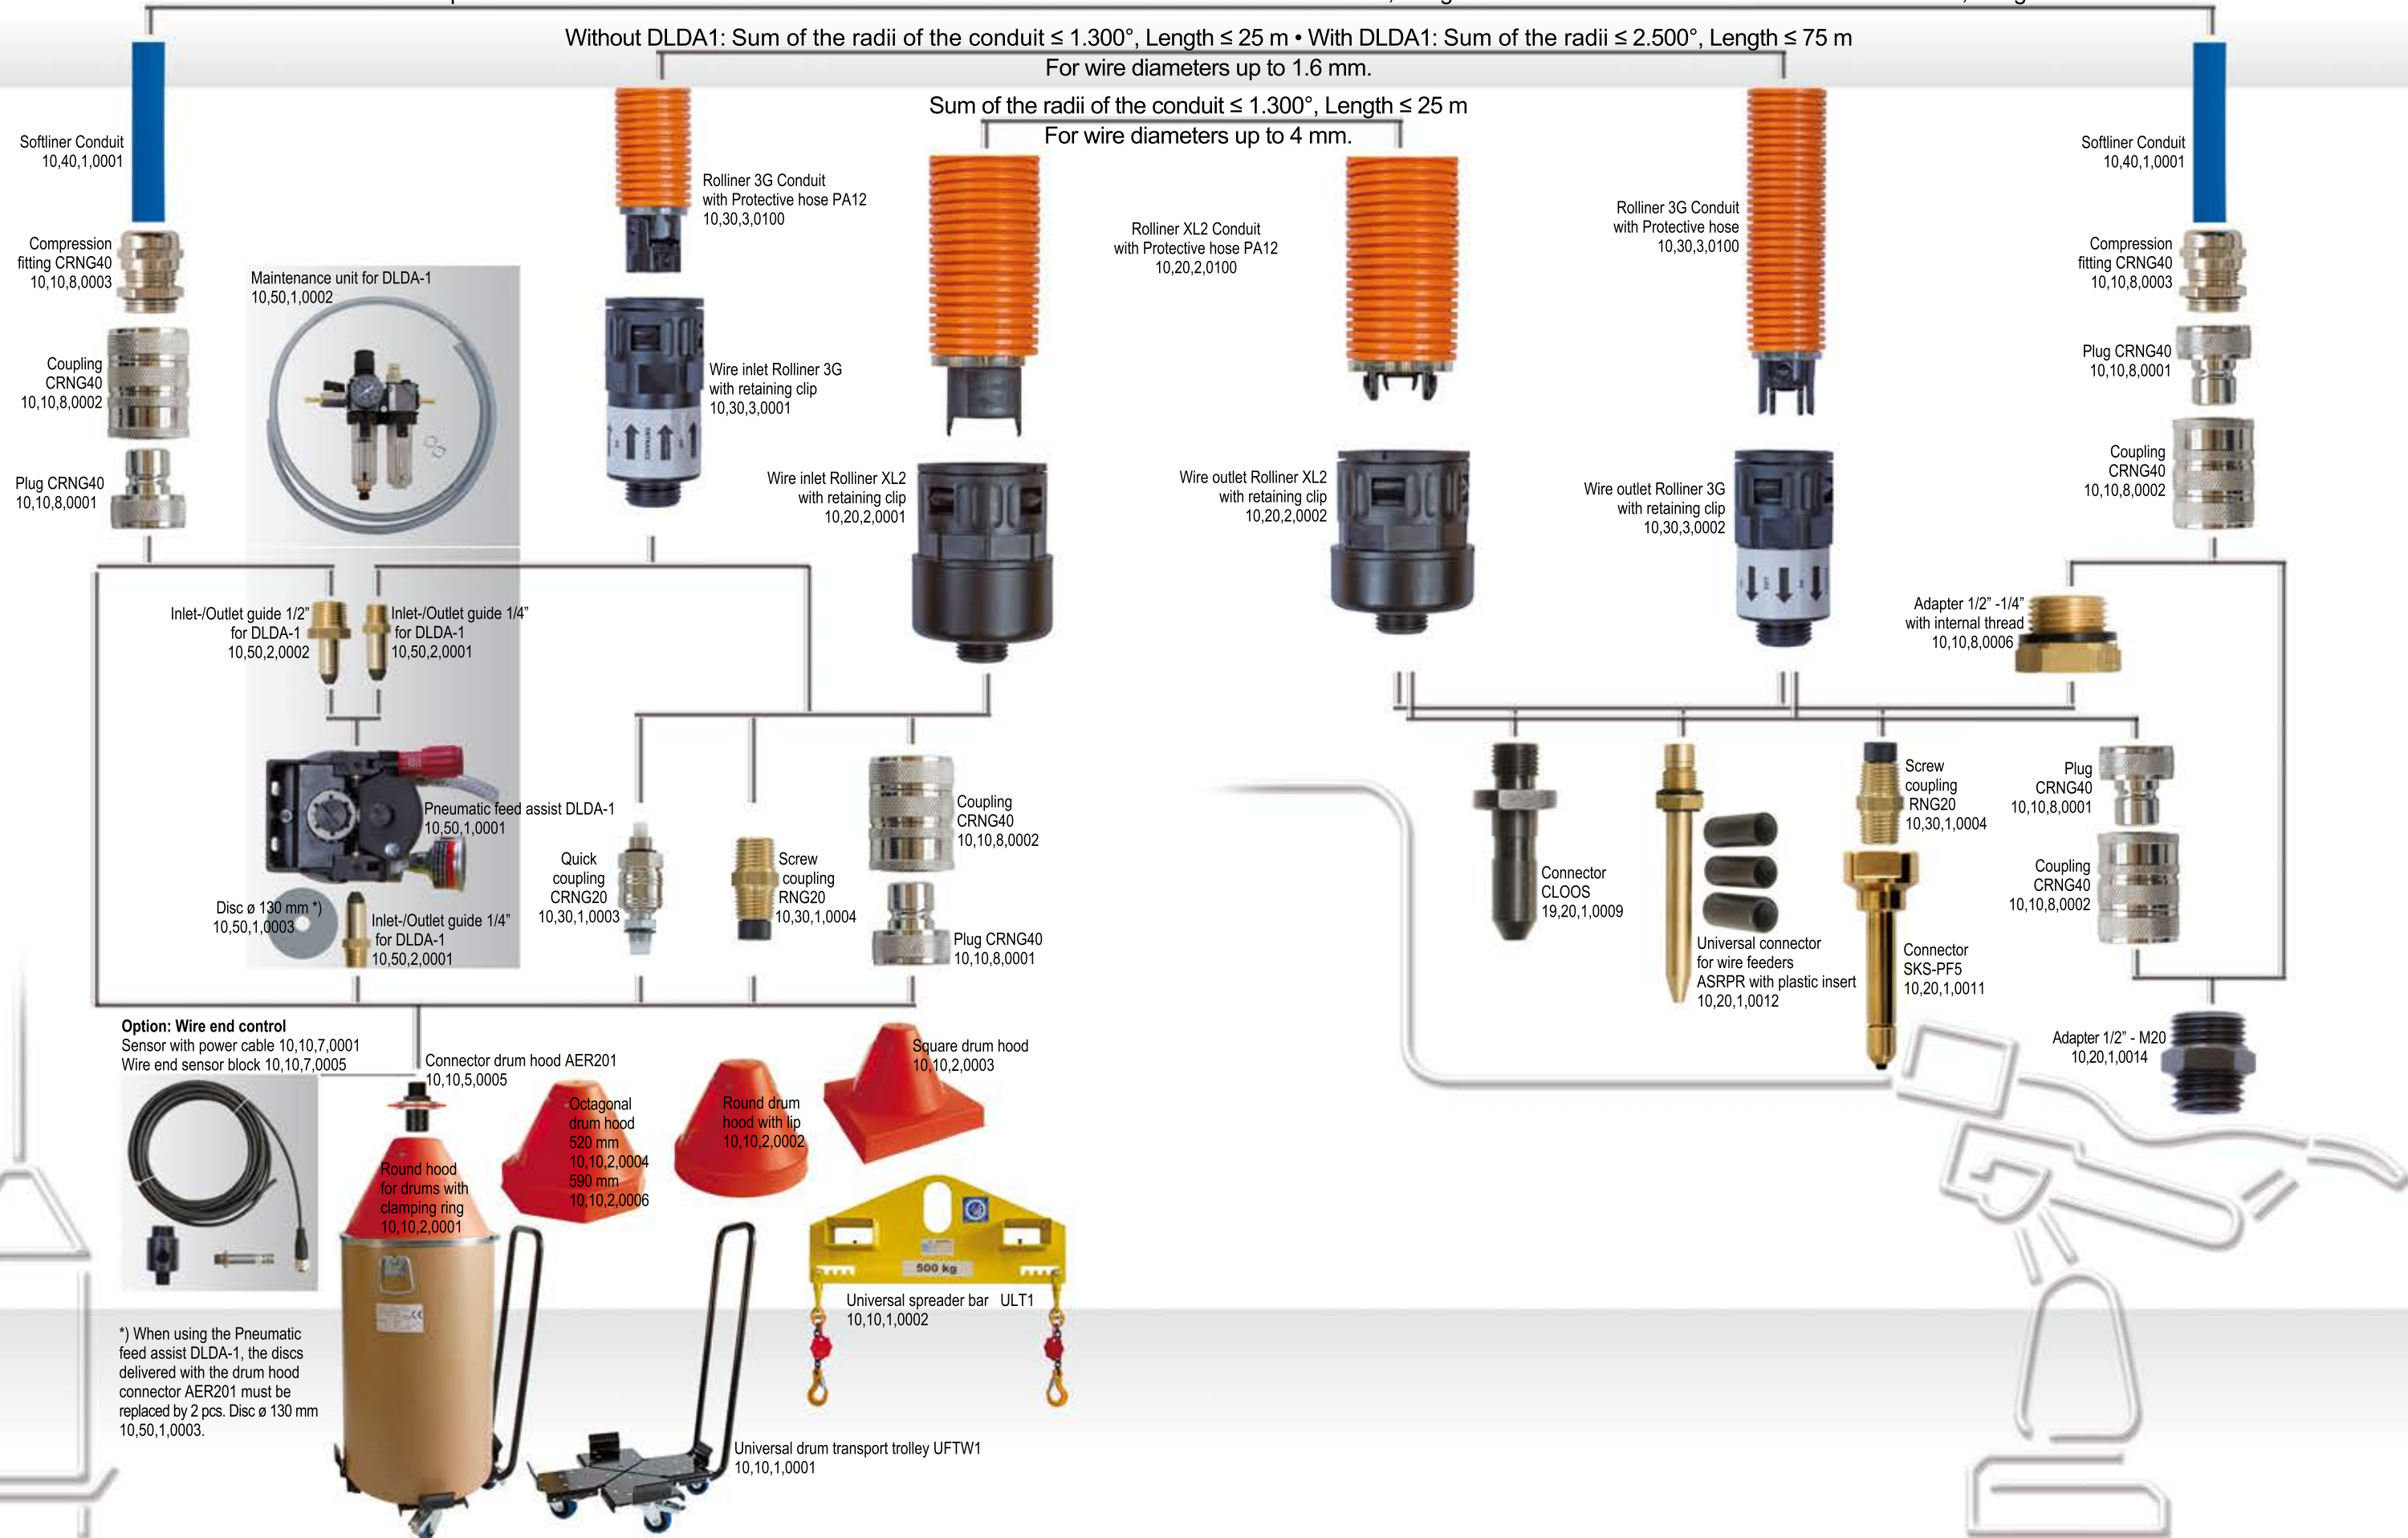

*) When using the Pneumatic feed assist DLDA-1, the discs delivered with the drum hood connector AER201 must be replaced by 2 pcs. Disc ϕ 130 mm 10,50,1,0003.